





WARNING CLEAN FILLER AND REMOVE EXCESS FLUID FROM A SEALED CONTAINER BEFORE REMOVING THE CAP. TO PREVENT BREMSFLUID FROM SPREADING ON SURFACES. REMOVING USE ONLY IN A SEALED CONTAINER. TO PREVENT BREMSFLUID FROM SPREADING ON SURFACES. TO PREVENT BREMSFLUID FROM SPREADING ON SURFACES.

MAX
MIN

AGM
55Ah
12V
1000A

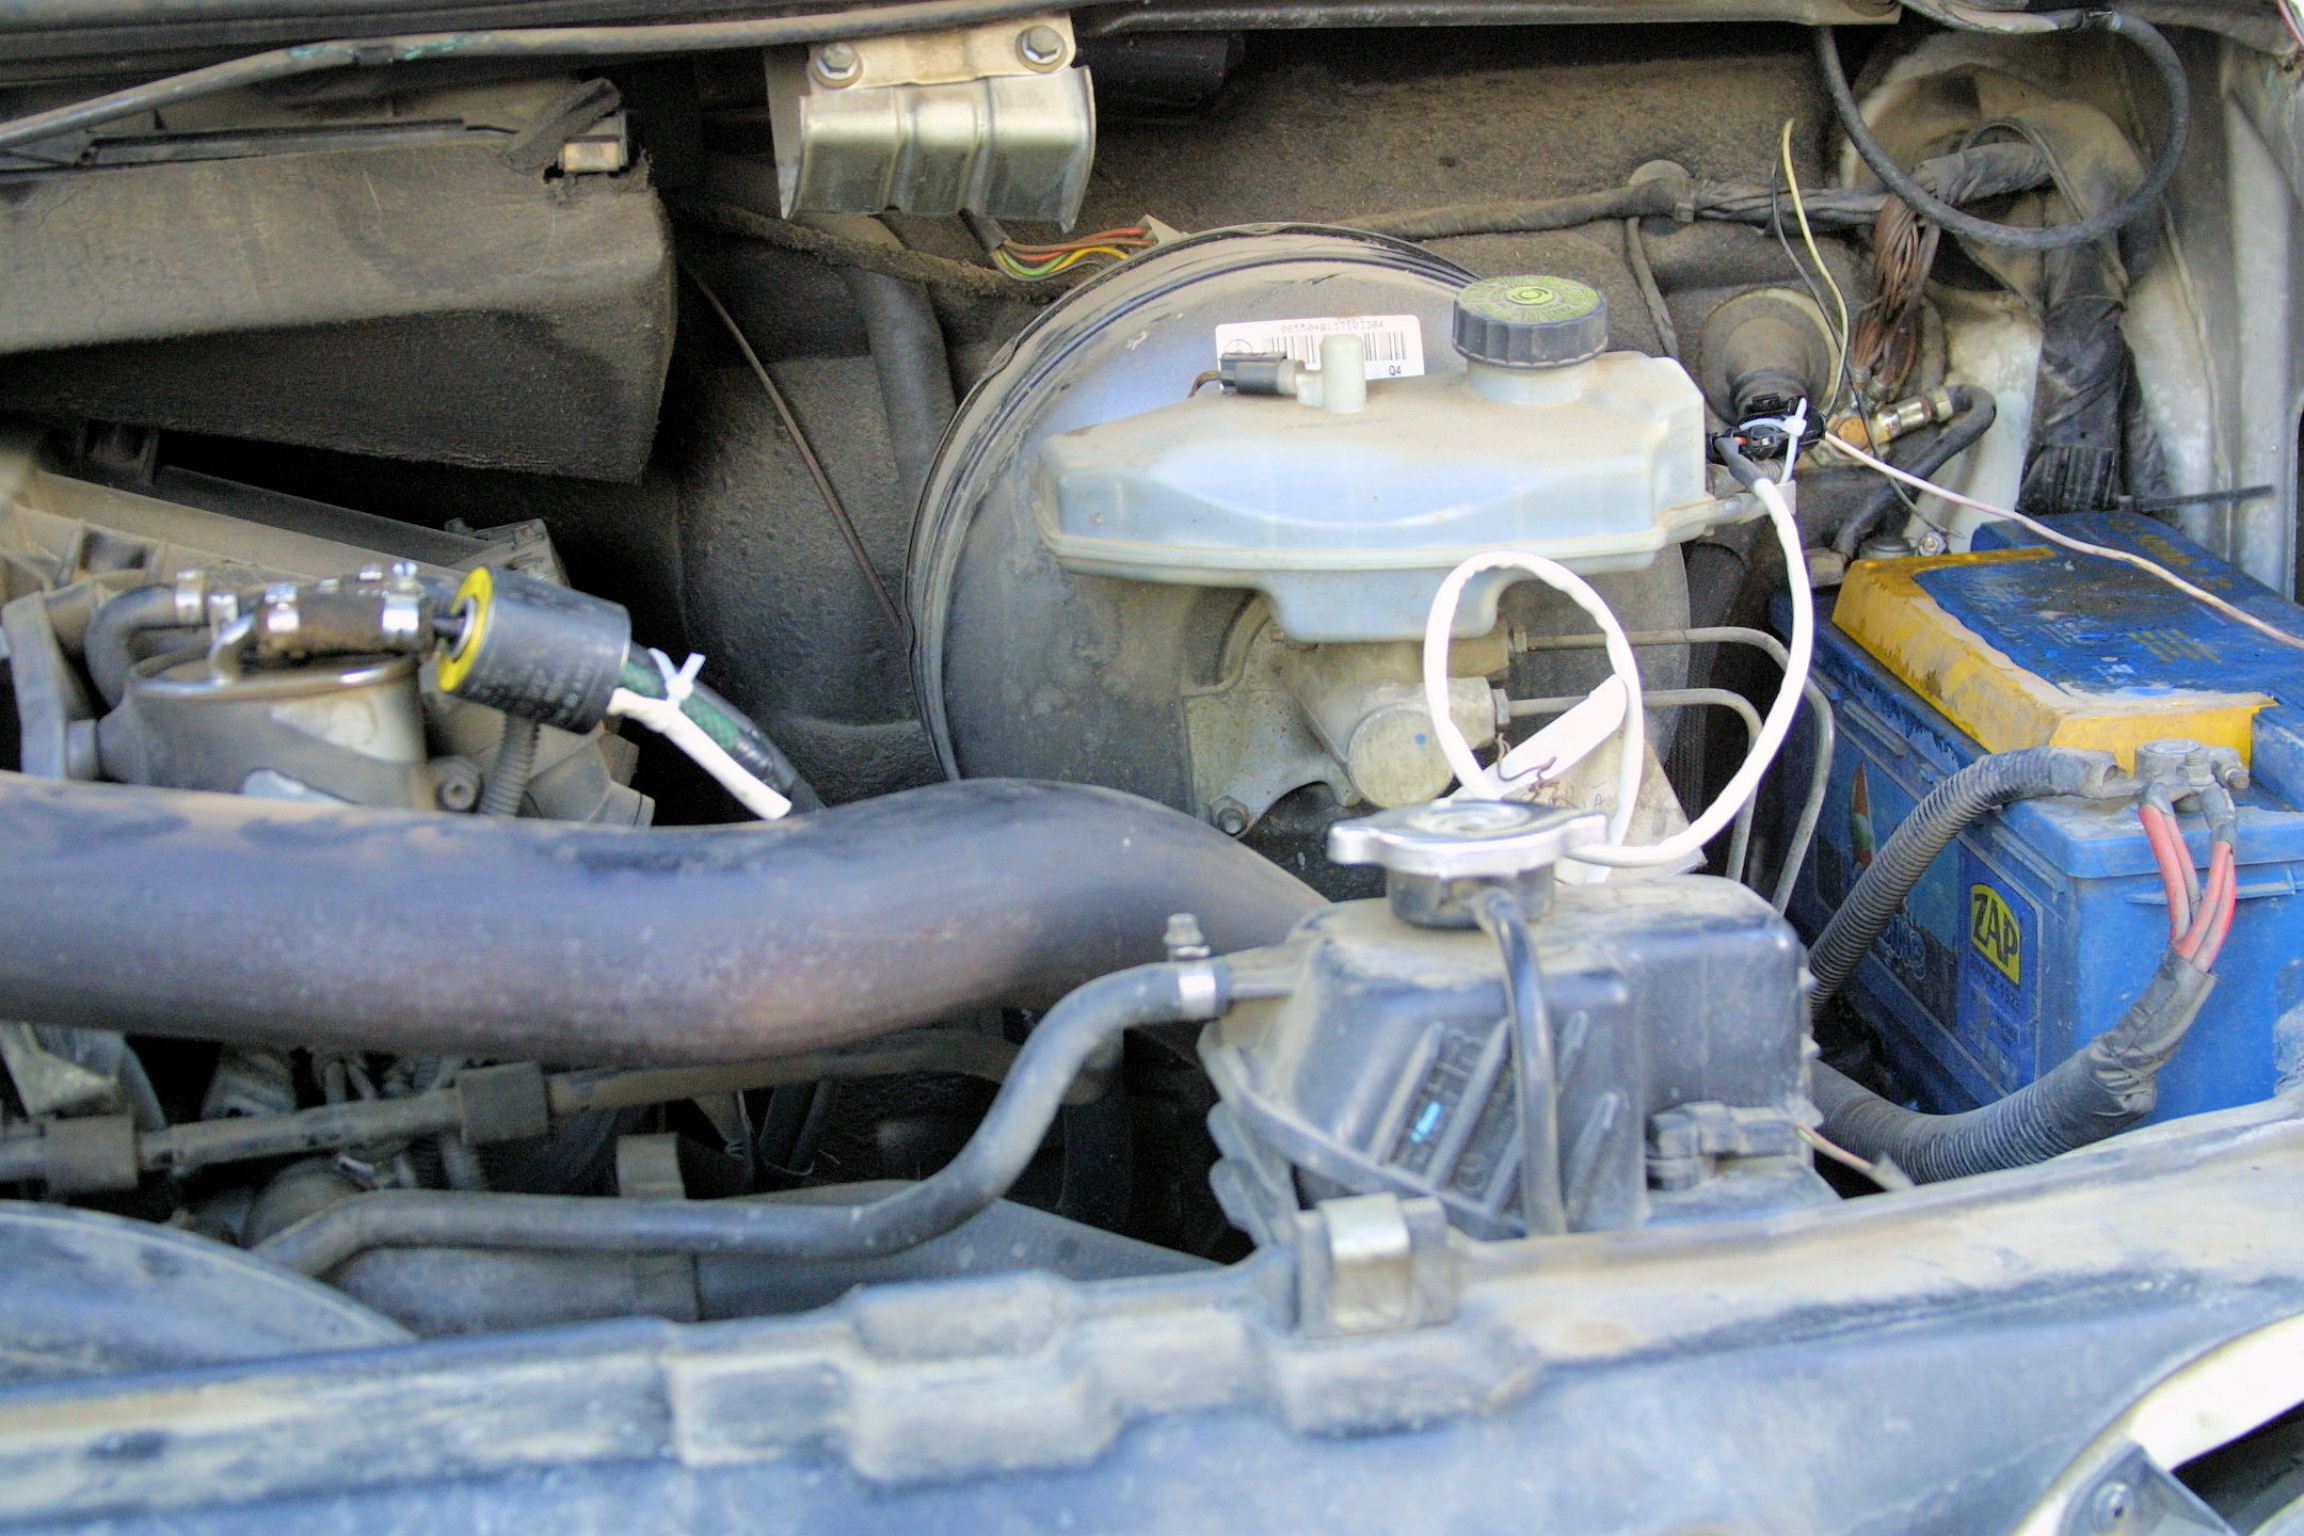

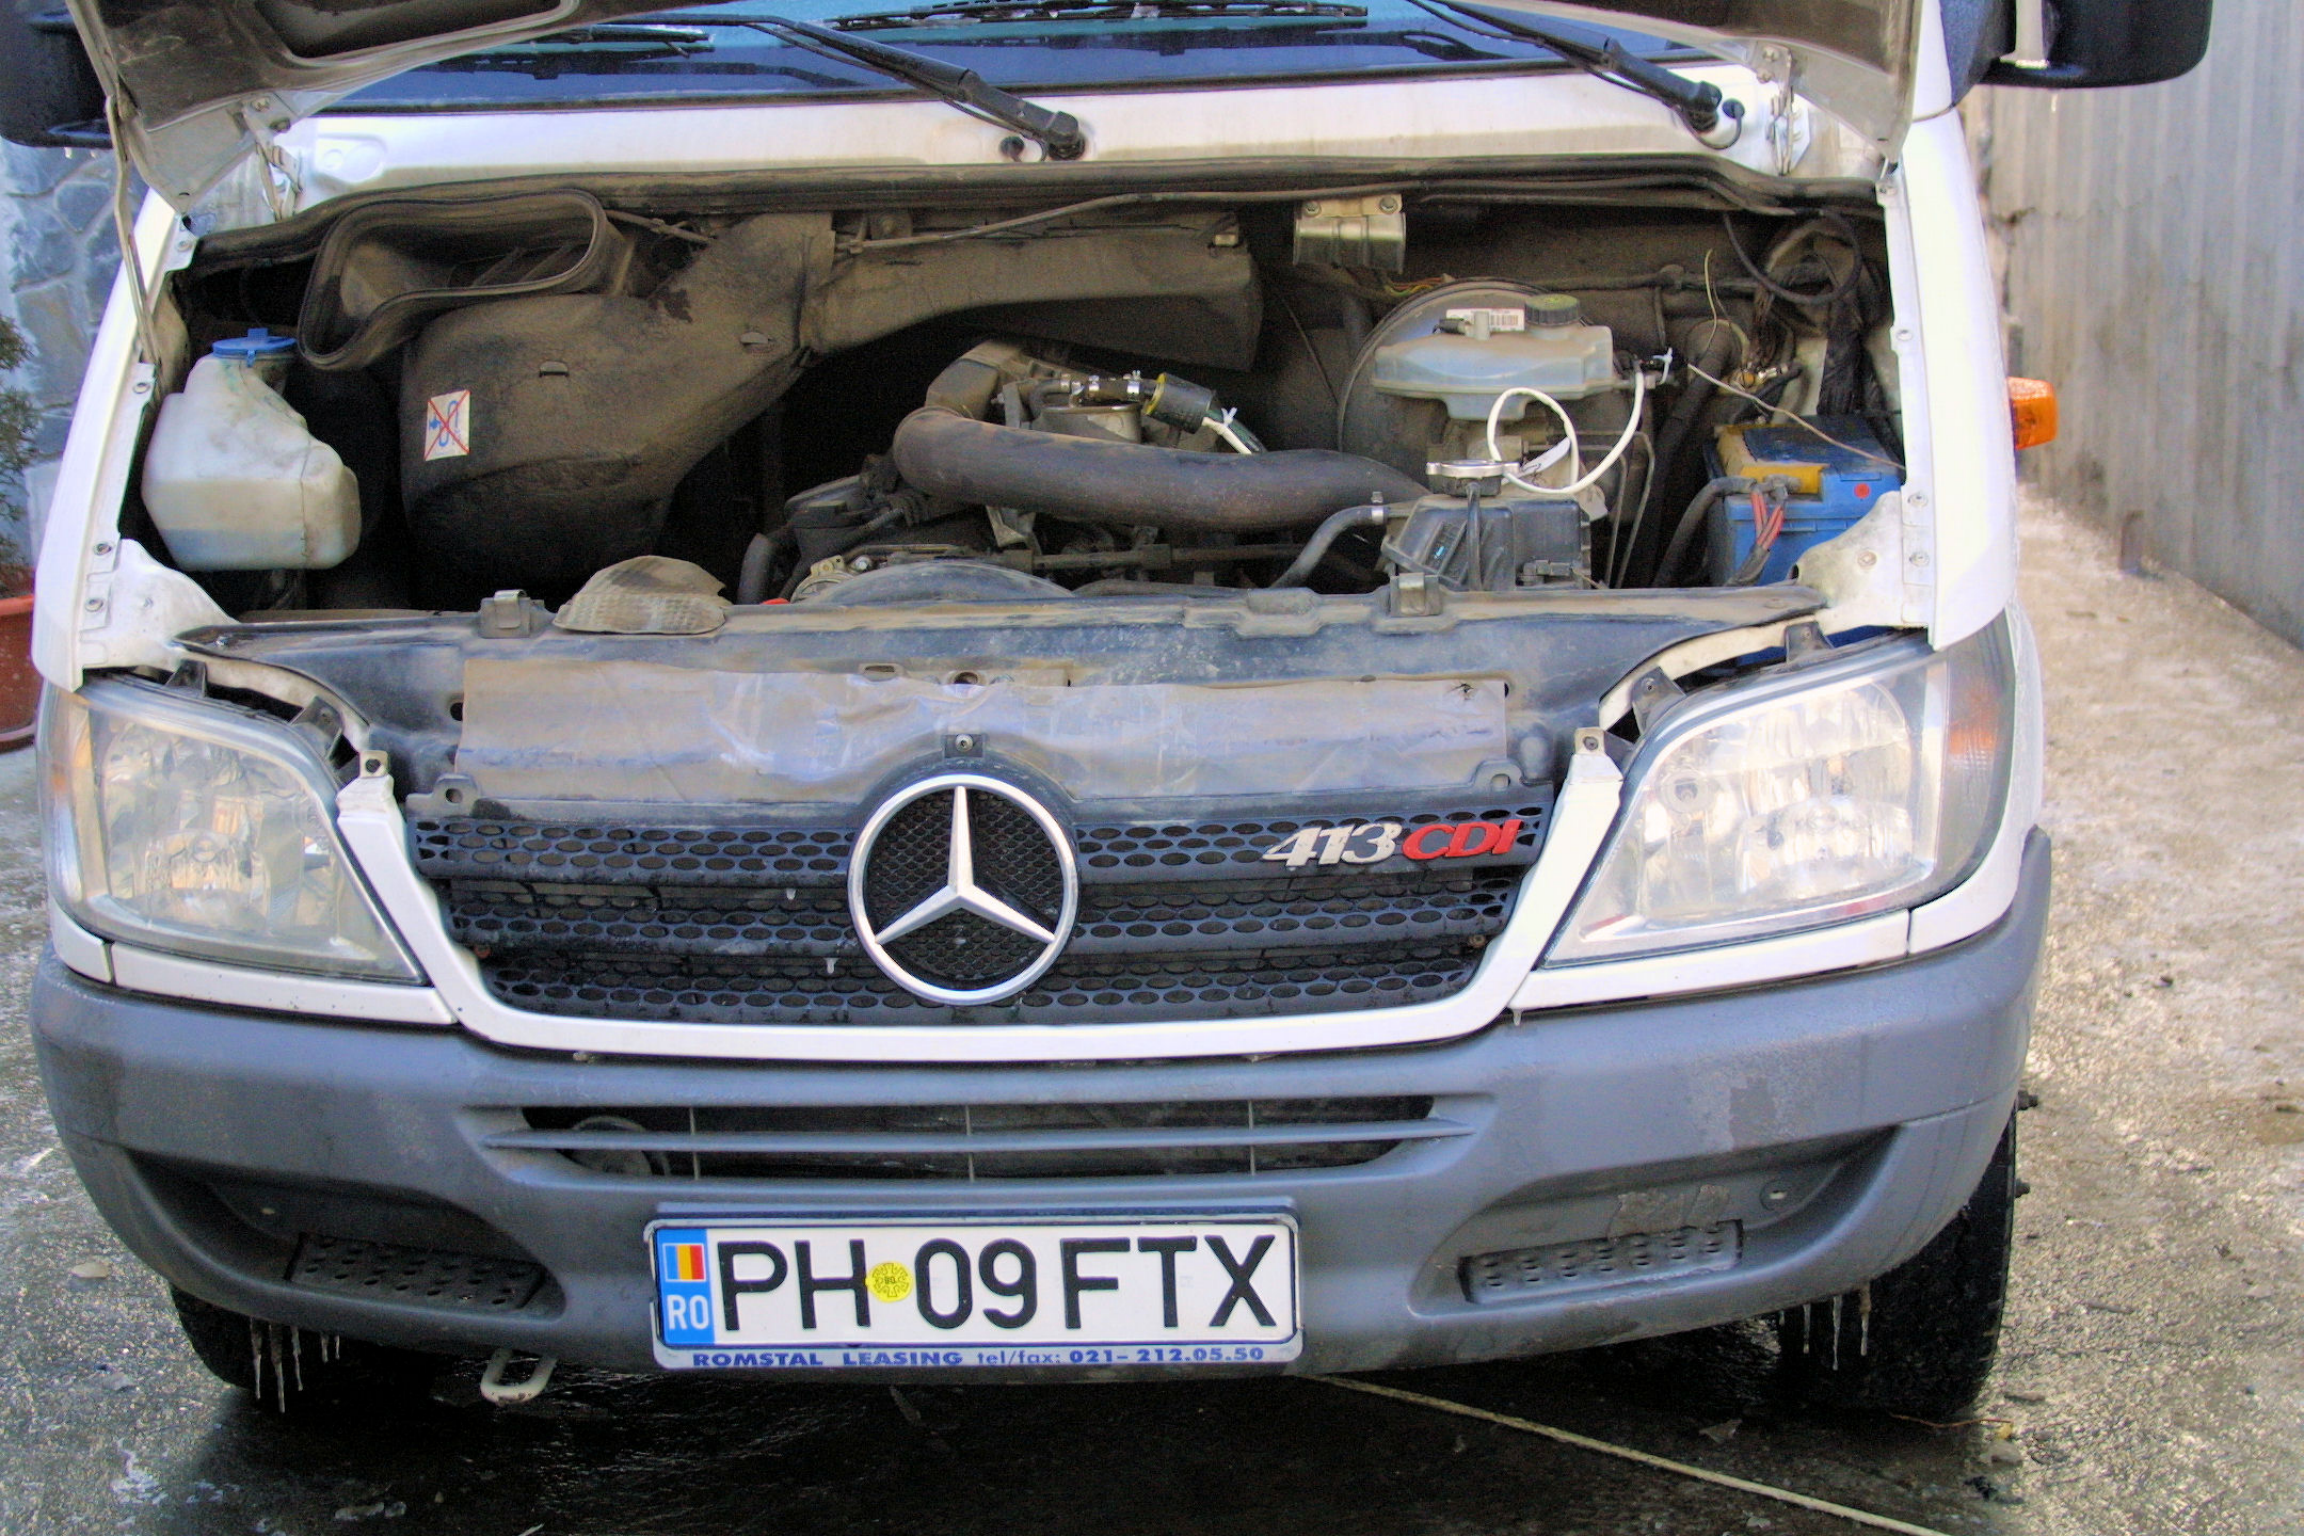

413 CDI

RO PH 09 FTX
ROMSTAL LEASING tel/fax: 021- 212.05.50

